



Nominal Capacity		1200mAh	
Nominal Voltage		1.2V	
Charging Current	Standard	120mA	
	Fast	1800mA	
Charging Time	Standard	14 to 16Hrs.	
	Fast	about 1Hr.	
Ambient Temperature	Charge	Standard	0 to 45°C [32 to 113°F]
		Fast	0 to 45°C [32 to 113°F]
	Discharge	-20 to 60°C [-4 to 140°F]	
	Storage	-30 to 50°C [-22 to 122°F]	
Internal Impedance(Av.) (at. 50% discharge)		10mOhms (at 1000Hz)	
Weight		38g/1.34oz	
Dimensions(D)x(H) (with tube)	(L)	67 ⁰ ₋₁ mm	2.64 ⁰ _{-0.04} inch
	(W)	17.0 ⁰ _{-0.7} mm	0.67 ⁰ _{-0.03} inch
	(T)	10.5 ⁰ _{-0.6} mm	0.41 ⁰ _{-0.02} inch

Typical Characteristics


Charge

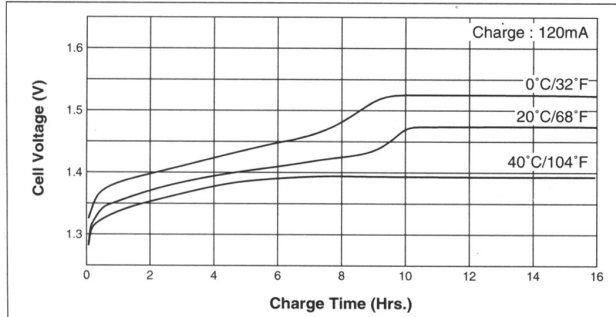


Discharge (at high rate)

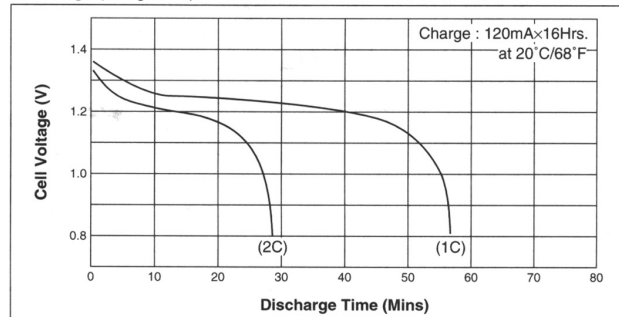


Charge

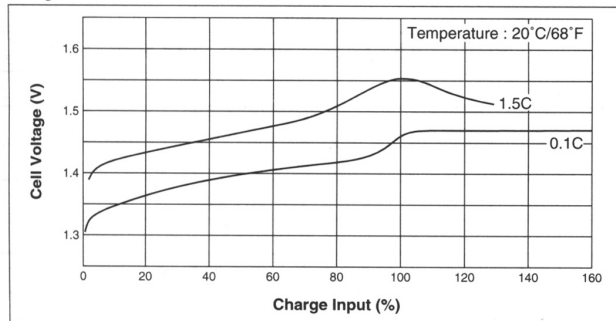

Discharge (at high rate)

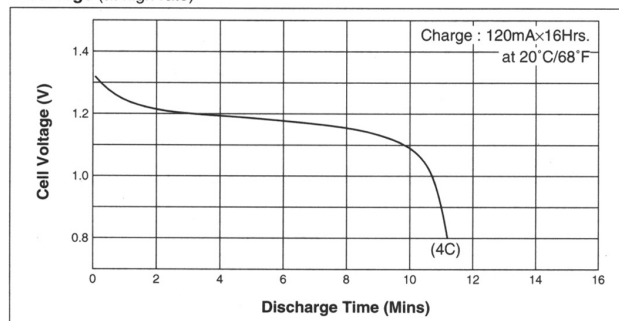

Discharge (at low rate)

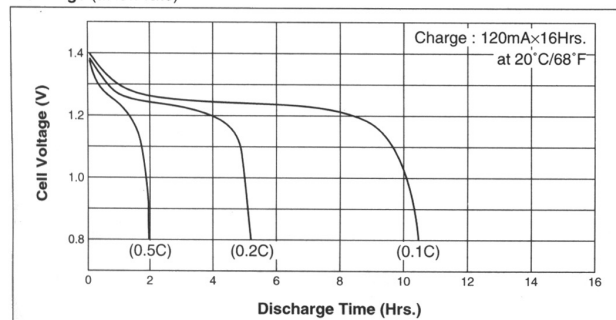

Temperature (Charge & Discharge)

