



## Specifications

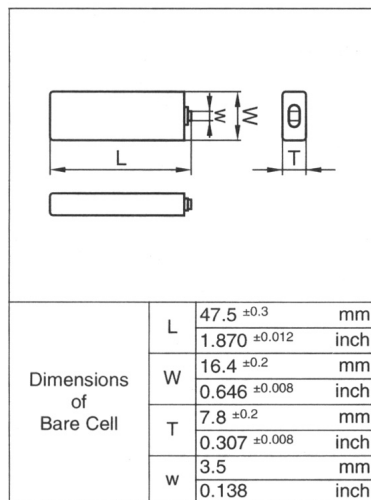


Nominal Capacity		650mAh	
Nominal Voltage		1.2V	
Charging Current	Standard	65mA	
	Quick	130mA	
	Fast	975mA	
Charging Time	Standard	14 to 16Hrs.	
	Quick	7 to 8Hrs.	
	Fast	about 1Hr.	
Ambient Temperature	Charge	Standard	0 to 45 °C [32 to 113 °F]
		Quick	0 to 45 °C [32 to 113 °F]
		Fast	0 to 45 °C [32 to 113 °F]
	Discharge	-20 to 60 °C [-4 to 140 °F]	
	Storage	-30 to 50 °C [-22 to 122 °F]	
Internal Impedance(Av.) (at. 50% discharge)		16mOhms (at 1000Hz)	
Weight		22g/0.78oz	
Dimensions(D)x(H) (with tube)	(L)	48 <sup>0</sup> <sub>-0.8</sub> mm	1.89 <sup>0</sup> <sub>-0.03</sub> inch
	(W)	17.0 <sup>0</sup> <sub>-0.7</sub> mm	0.67 <sup>0</sup> <sub>-0.03</sub> inch
	(T)	8.3 <sup>0</sup> <sub>-0.6</sub> mm	0.33 <sup>0</sup> <sub>-0.02</sub> inch

### Typical Characteristics


Charge

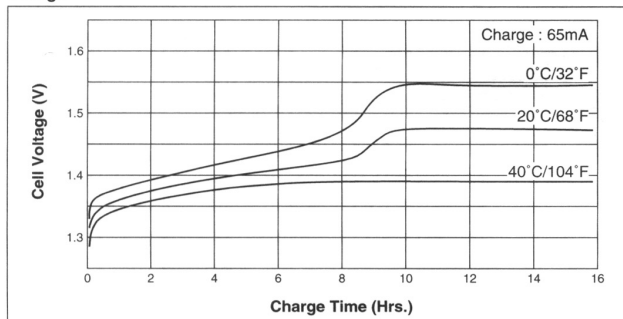


Discharge (at high rate)

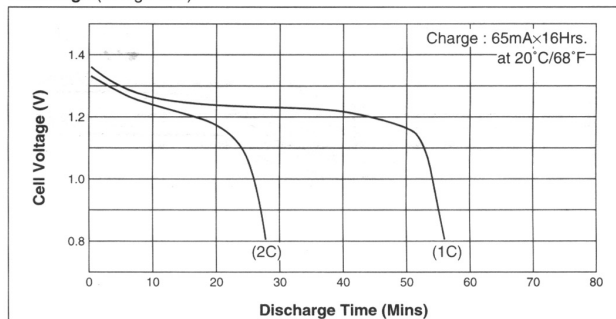


Charge

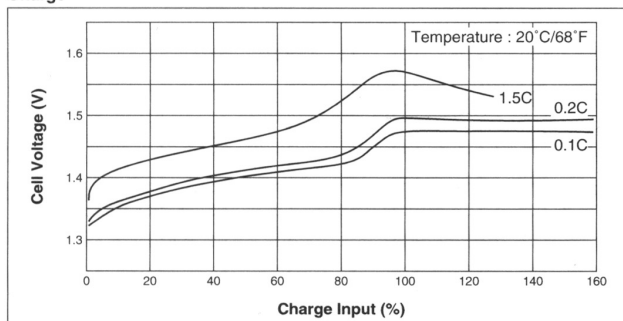

Discharge (at high rate)

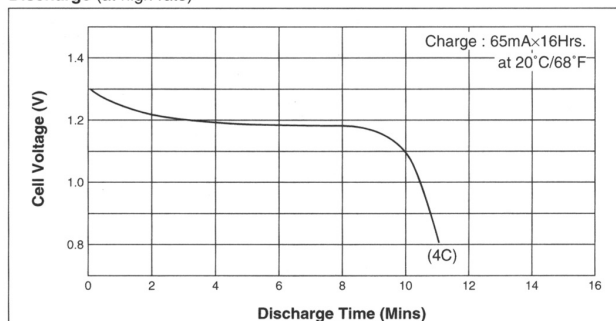

Discharge (at low rate)

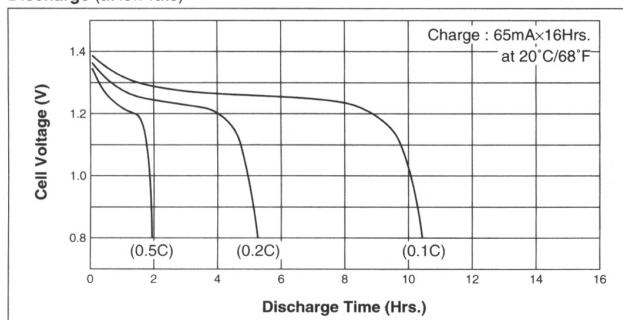

Temperature (Charge & Discharge)

