


# SANYO

## Cadnica

# Cell Type KR-1500AUL


## Specifications

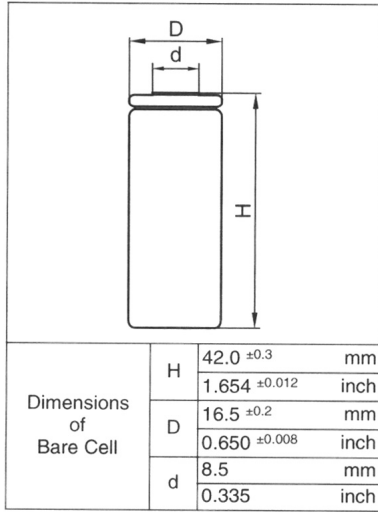


Nominal Capacity		1500mAh	
Nominal Voltage		1.2V	
Charging Current	Standard	150mA	
	Fast	2300mA	
Charging Time	Standard	14 to 16Hrs.	
	Fast	about 1Hr.	
Ambient Temperature	Charge	Standard	0 to 45 °C [32 to 113 °F]
		Fast	0 to 45 °C [32 to 113 °F]
	Discharge		-20 to 60 °C [-4 to 140 °F]
	Storage		-30 to 50 °C [-22 to 122 °F]
Internal Impedance(Av.) (at 50% discharge)		16mOhms (at 1000Hz)	
Weight		31g/1.09oz	
Dimensions(D)x(H) (with tube)		17.0 <sup>0</sup> <sub>-1</sub> x 43 <sup>0</sup> <sub>-1.5</sub> mm 0.67 <sup>0</sup> <sub>-0.04</sub> x 1.69 <sup>0</sup> <sub>-0.06</sub> inch	

### Typical Characteristics


#### Charge

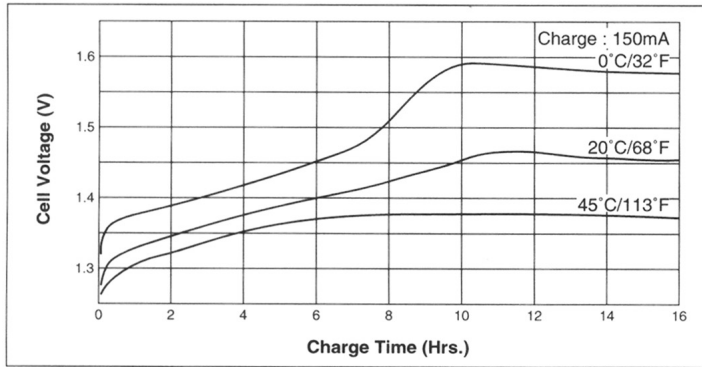


#### Discharge (at high rate)

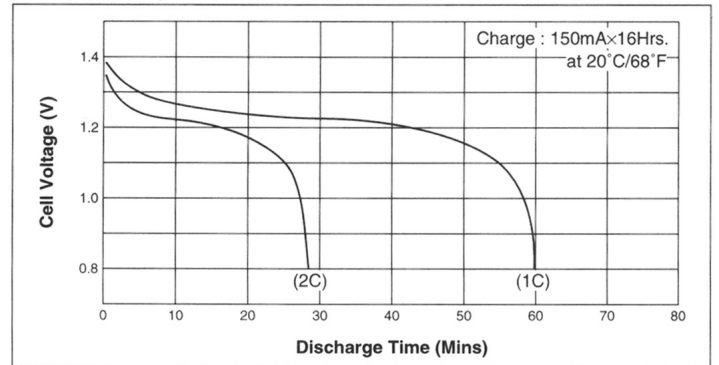


#### Charge

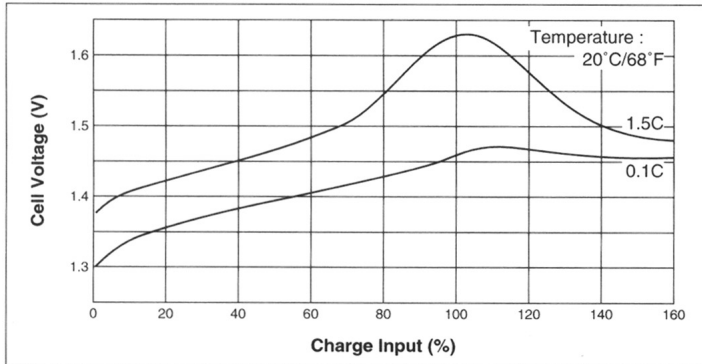

#### Discharge (at high rate)

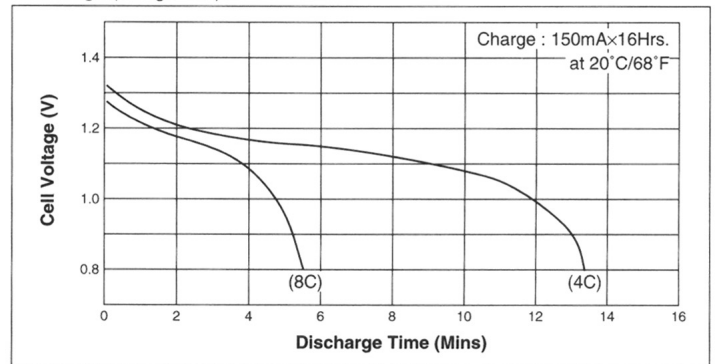

#### Discharge (at low rate)

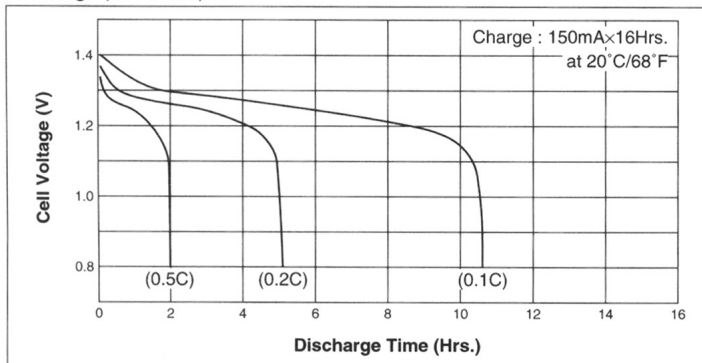

#### Temperature (Charge & Discharge)

