



Nominal Capacity		20000mAh
Nominal Voltage		1.2V
Charging Current		2000mA
Charging Time		14 to 16Hrs.
Ambient Temperature	Charge	0 to 45°C [32 to 113°F]
	Discharge	-20 to 60°C [-4 to 140°F]
	Storage	-30 to 50°C [-22 to 122°F]
Internal Impedance(Av.) (at 50% discharge)		2.5mOhms (at 1000Hz)
Weight		640g/22.57oz
Dimensions(D)x(H) (with tube)		43.0 <sup>0</sup> / <sub>-2</sub> x 146 <sup>0</sup> / <sub>-2</sub> mm 1.69 <sup>0</sup> / <sub>-0.08</sub> x 5.75 <sup>0</sup> / <sub>-0.08</sub> inch

### Typical Characteristics


#### Charge

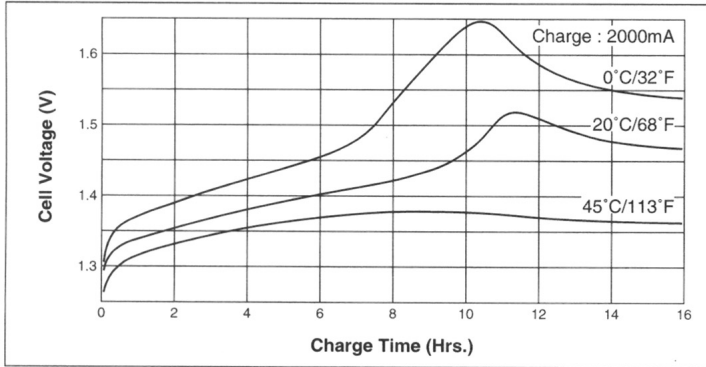


#### Cell Capacity (at various discharge rate)

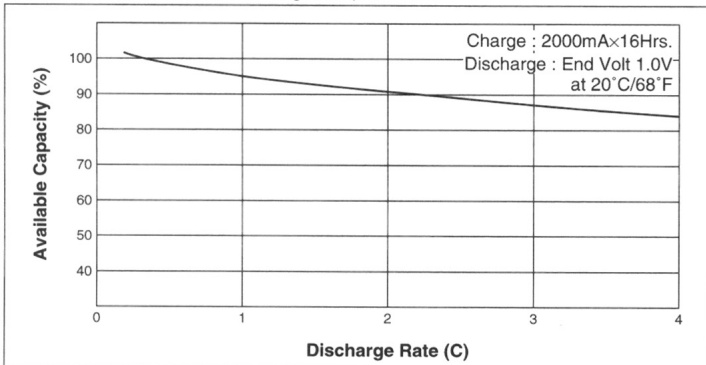

#### Discharge (at high rate)

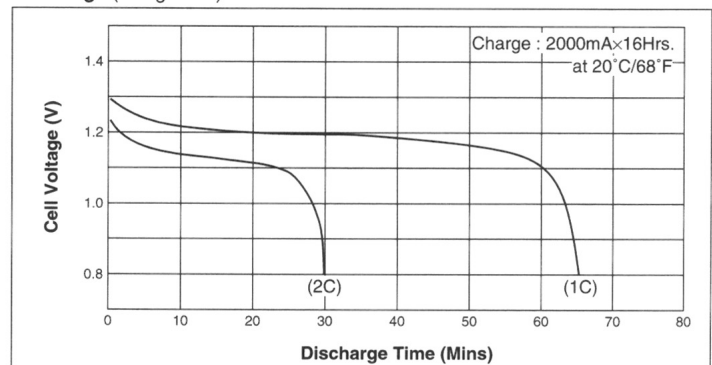

#### Discharge (at low rate)

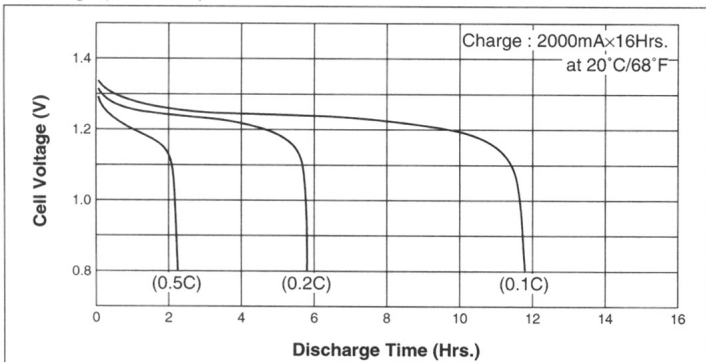

#### Temperature (Charge & Discharge)

