



Specifications

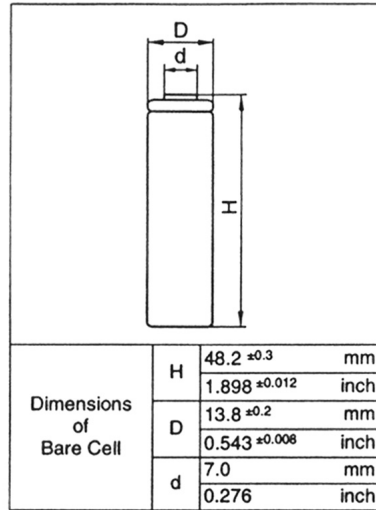


Nominal Capacity		600mAh	
Nominal Voltage		1.2V	
Charging Current	Standard	60mA	
	Quick	120mA	
	Fast	900mA	
Charging Time	Standard	14 to 16Hrs.	
	Quick	7 to 8Hrs.	
	Fast	about 1Hr.	
Ambient Temperature	Charge	Standard	0 to 45°C [32 to 113°F]
		Quick	10 to 45°C [50 to 113°F]
		Fast	0 to 45°C [32 to 113°F]
	Discharge	-20 to 60°C [-4 to 140°F]	
Storage		-30 to 50°C [-22 to 122°F]	
Internal Impedance (Av.) (at 50% discharge)		16mOhms (at 1000Hz)	
Weight		21g/0.74oz	
Dimensions(D)x(H) (with tube)		14.2 ⁰ _{-0.5} x 48.7 ⁰ ₋₁ mm 0.56 ⁰ _{-0.02} x 1.92 ⁰ _{-0.04} inch	

Typical Characteristics


Charge

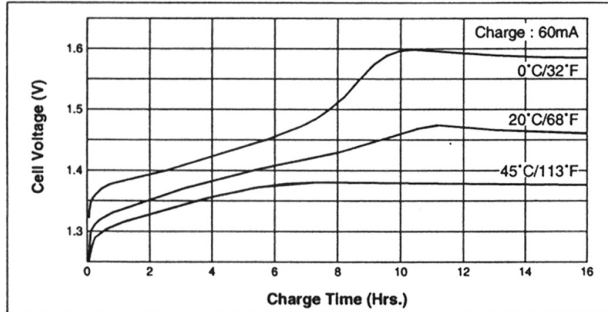


Discharge (at high rate)

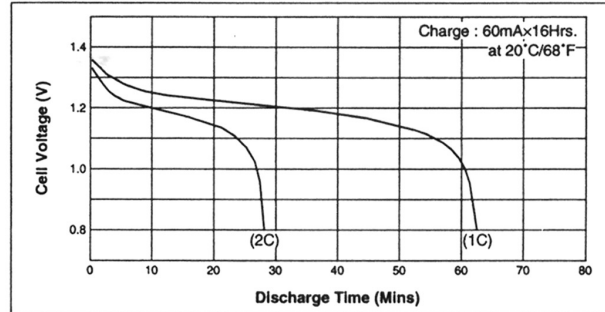


Charge

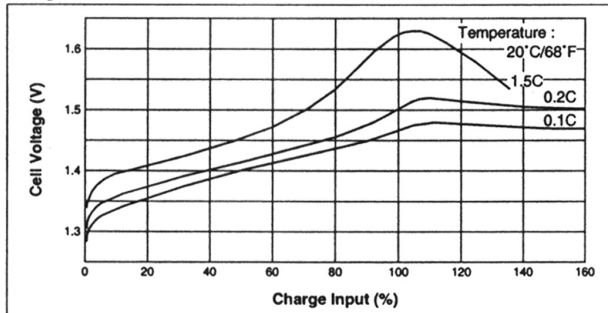

Discharge (at high rate)

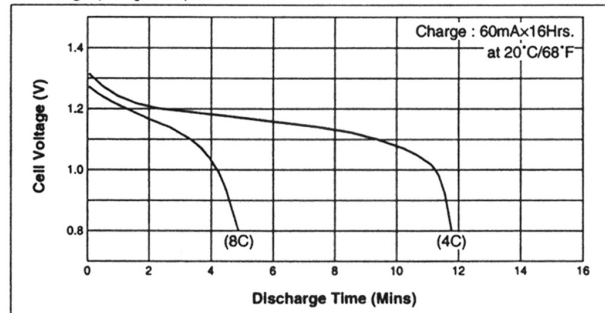

Discharge (at low rate)

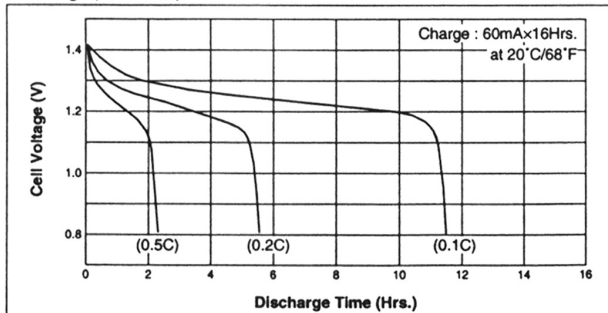

Temperature (Charge & Discharge)

