




Cadnica

Cell Type KR-800AAE


Specifications

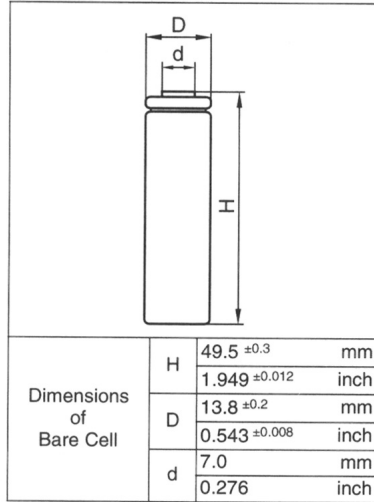


Nominal Capacity		800mAh	
Nominal Voltage		1.2V	
Charging Current	Standard	80mA	
	Quick	160mA	
	Fast	1200mA	
Charging Time	Standard	14 to 16Hrs.	
	Quick	7 to 8Hrs.	
	Fast	about 1Hr.	
Ambient Temperature	Charge	Standard	0 to 45°C [32 to 113°F]
		Quick	0 to 45°C [32 to 113°F]
		Fast	0 to 45°C [32 to 113°F]
	Discharge		-20 to 60°C [-4 to 140°F]
	Storage		-30 to 50°C [-22 to 122°F]
Internal Impedance (Av.) (at 50% discharge)		12mOhms (at 1000Hz)	
Weight		23g/0.81oz	
Dimensions(D)x(H) (with tube)		14.2 ⁰ _{-0.5} x 50.5 ⁰ ₋₁ mm 0.56 ⁰ _{-0.02} x 1.99 ⁰ _{-0.04} inch	

Typical Characteristics


Charge

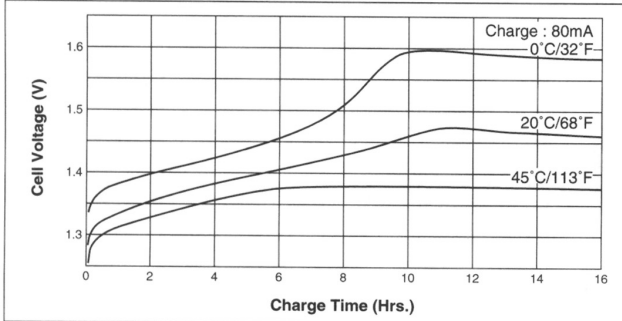


Discharge (at high rate)

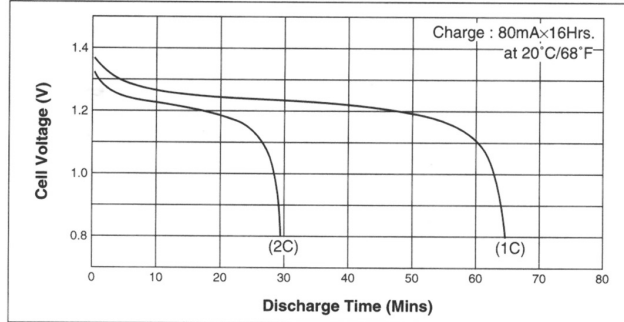


Charge

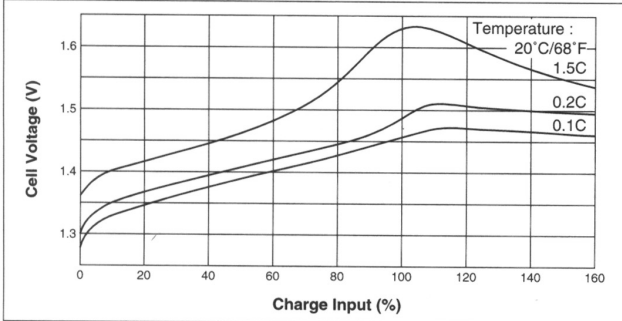

Discharge (at high rate)

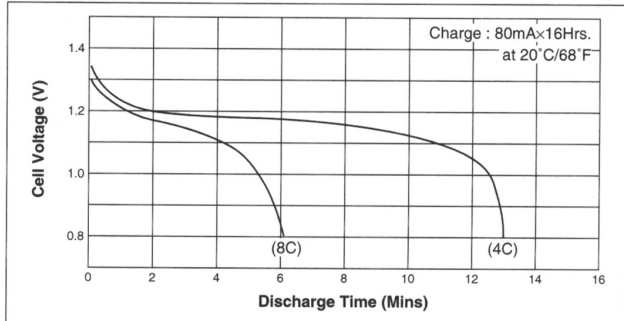

Discharge (at low rate)

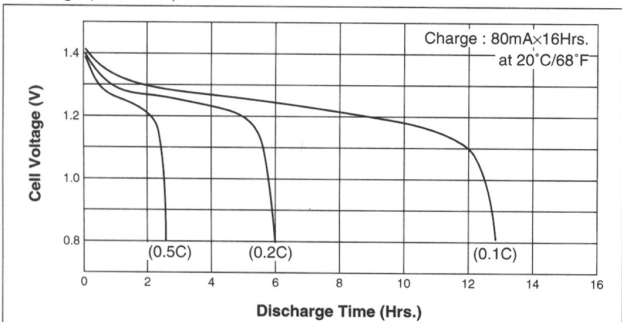

Temperature (Charge & Discharge)

