
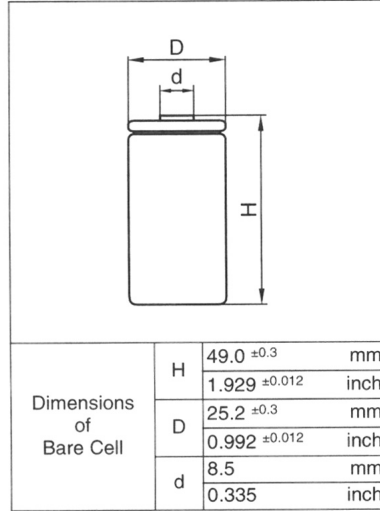


SANYO

Cadnica

Cell Type KR-CH(2.5)


Specifications

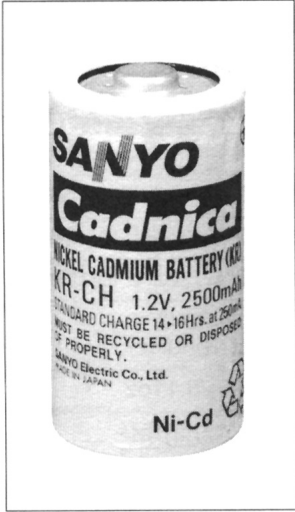


Nominal Capacity		2500mAh
Nominal Voltage		1.2V
Charging Current	Trickle	83mA
	Standard	250mA
Charging Time	Trickle	above 48Hrs.
	Standard	14 to 16Hrs.
Ambient Temperature	Charge	0 to 70 °C [32 to 158 °F]
	Discharge	-20 to 70 °C [-4 to 158 °F]
	Storage	-30 to 70 °C [-22 to 158 °F]
Internal Impedance(Av.) (at 50% discharge)		6.5mOhms (at 1000Hz)
Weight		74g/2.61oz
Dimensions(D)x(H) (with tube)		25.8 ⁰ ₋₁ x 50 ⁰ ₋₁ mm 1.02 ⁰ _{-0.04} x 1.97 ⁰ _{-0.04} inch

Typical Characteristics


Charge

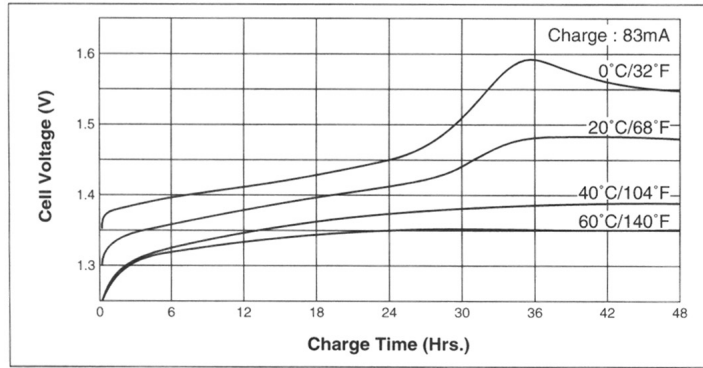


Discharge (at high rate)

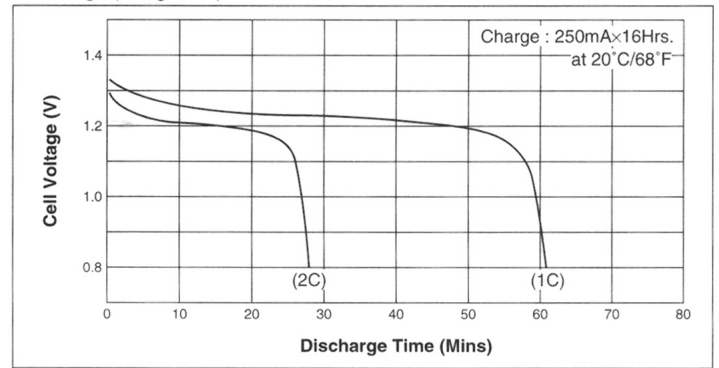


Charge

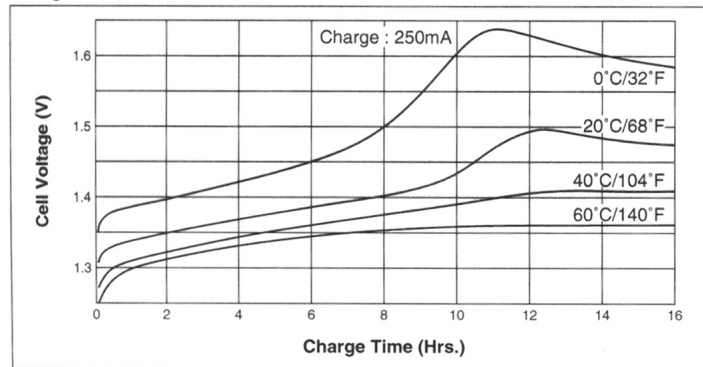

Discharge Trickle charge (at high temperature)

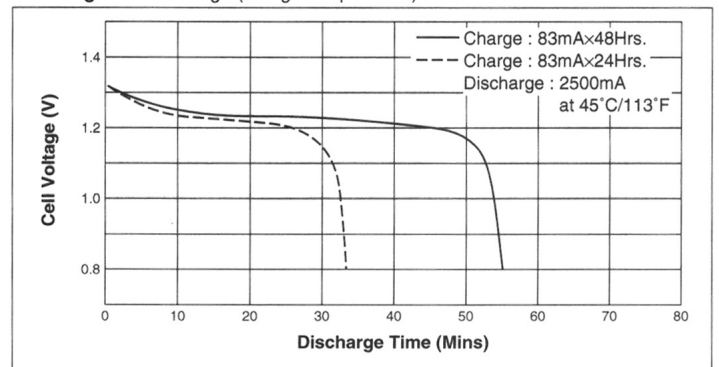

Discharge (at low rate)

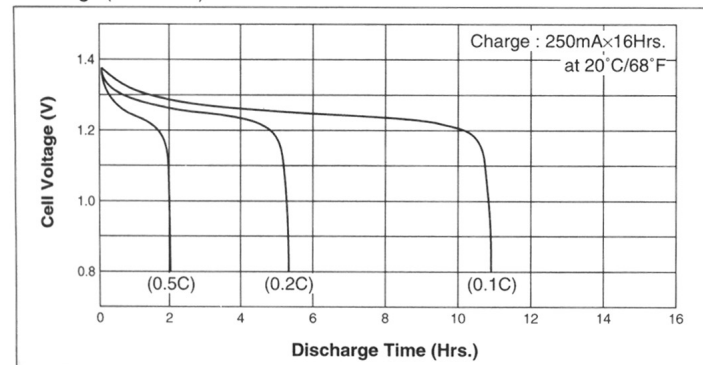

Temperature (Charge & Discharge)

