
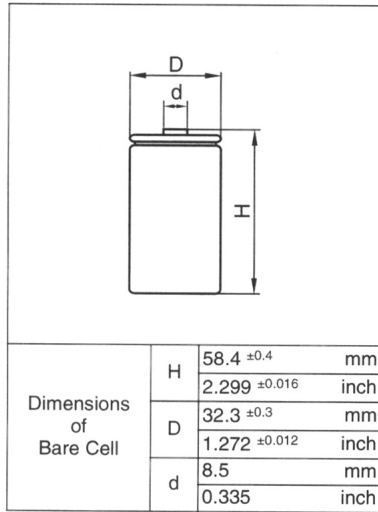


# Cell Type KR-DHL


## Specifications

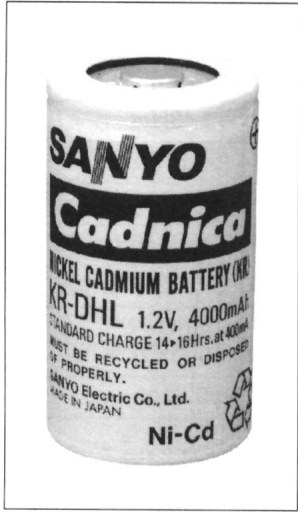


Nominal Capacity		4000mAh
Nominal Voltage		1.2V
Charging Current	Trickle	133mA
	Standard	400mA
Charging Time	Trickle	above 48Hrs.
	Standard	14 to 16Hrs.
Ambient Temperature	Charge	0 to 70 °C [32 to 158 °F]
	Discharge	-20 to 70 °C [-4 to 158 °F]
	Storage	-30 to 70 °C [-22 to 158 °F]
Internal Impedance(Av.) (at 50% discharge)		4.2mOhms (at 1000Hz)
Weight		145g/5.11oz
Dimensions(D)x(H) (with tube)		33.0 <sup>0</sup> <sub>-1</sub> x 60 <sup>0</sup> <sub>-2</sub> mm 1.3 <sup>0</sup> <sub>-0.04</sub> x 2.36 <sup>0</sup> <sub>-0.08</sub> inch

### Typical Characteristics


#### Charge

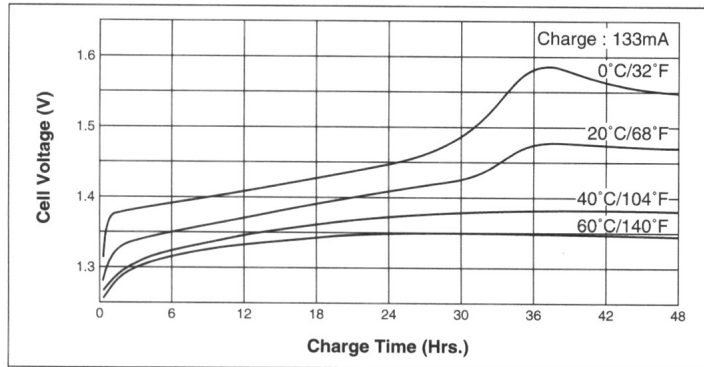


#### Discharge (at high rate)

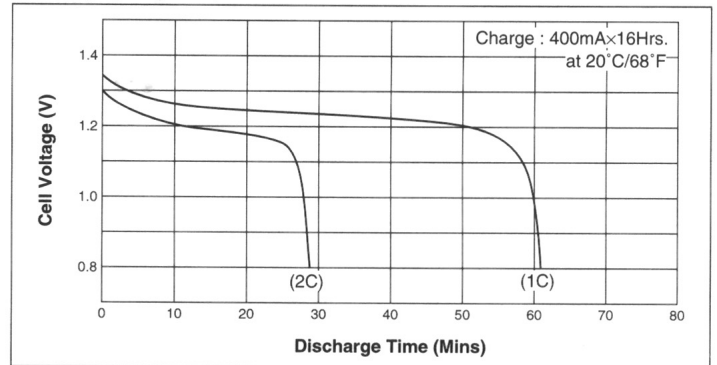


#### Charge

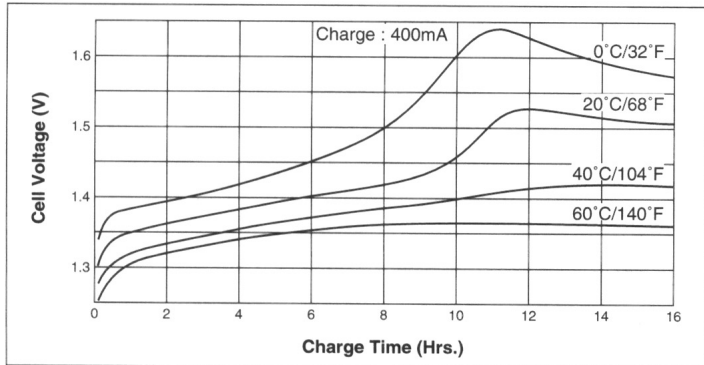

#### Discharge Trickle charge (at high temperature)

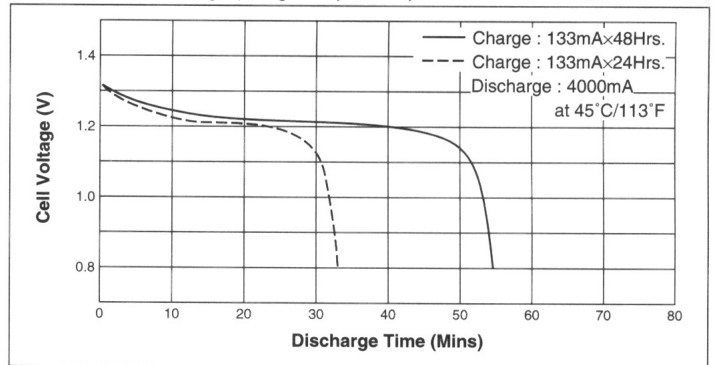

#### Discharge (at low rate)

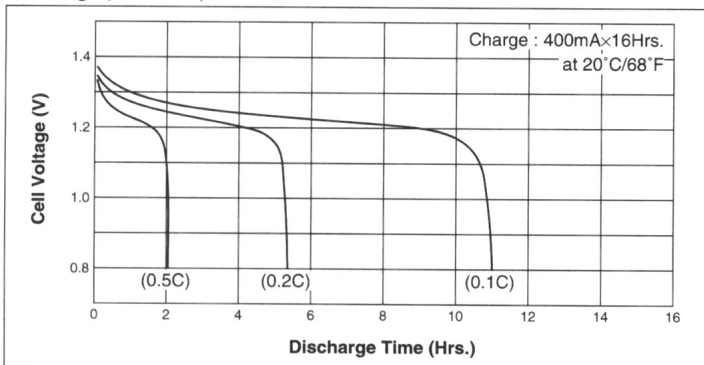

#### Temperature (Charge & Discharge)

