



# Cell Type KR-MH Specifications

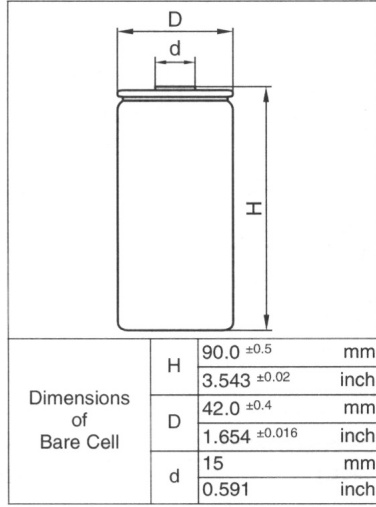


Nominal Capacity		10000mAh
Nominal Voltage		1.2V
Charging Current	Trickle	333mA
	Standard	1000mA
Charging Time	Trickle	above 48Hrs.
	Standard	14 to 16Hrs.
Ambient Temperature	Charge	0 to 70 °C [32 to 158 °F]
	Discharge	-20 to 70 °C [-4 to 158 °F]
	Storage	-30 to 70 °C [-22 to 158 °F]
Internal Impedance(Av.) (at 50% discharge)		2.6mOhms (at 1000Hz)
Weight		400g/14.11 oz
Dimensions(D)x(H) (with tube)		43.0 <sup>0</sup> / <sub>-2</sub> x 91 <sup>0</sup> / <sub>-2</sub> mm 1.69 <sup>0</sup> / <sub>-0.08</sub> x 3.58 <sup>0</sup> / <sub>-0.08</sub> inch

## Typical Characteristics


### Charge

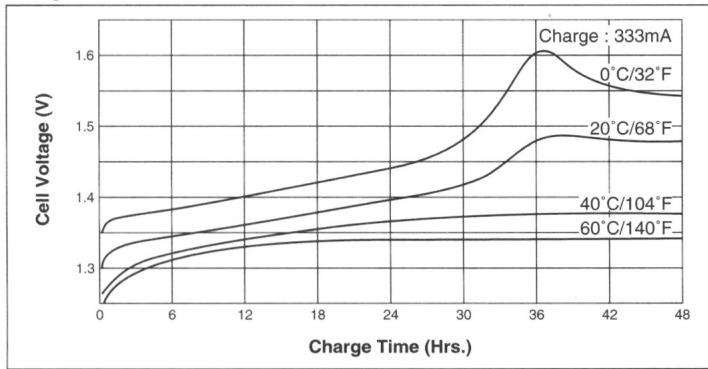


### Discharge (at high rate)

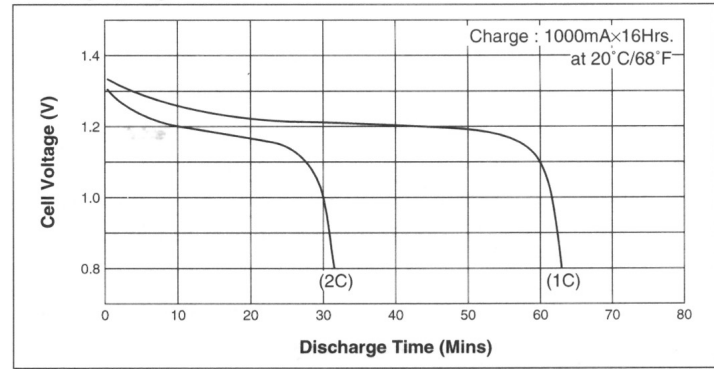


### Charge

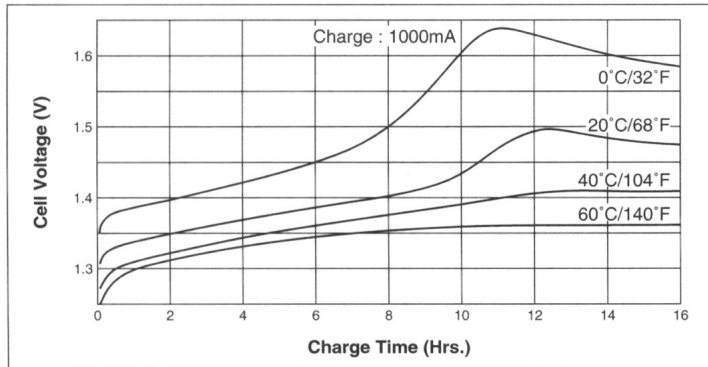

### Discharge Trickle charge (at high temperature)

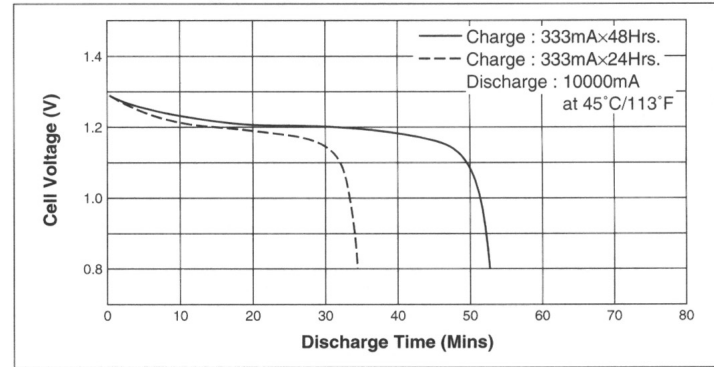

### Discharge (at low rate)

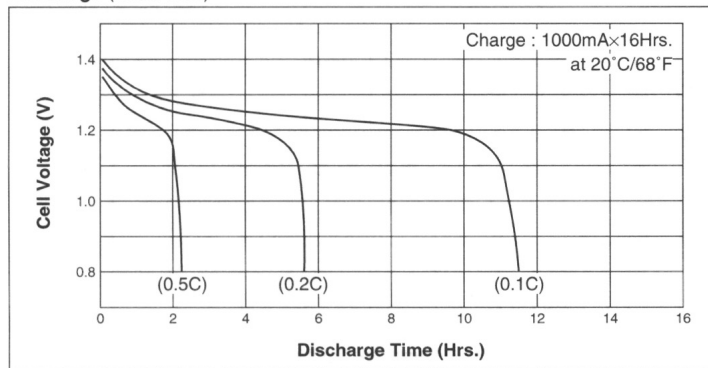

### Temperature (Charge & Discharge)

