



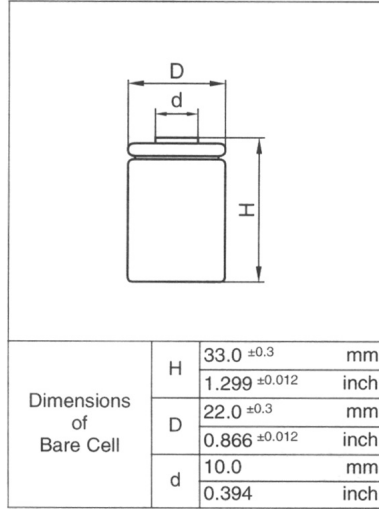

Cadnica

# Cell Type N-1250SCRL


## Specifications

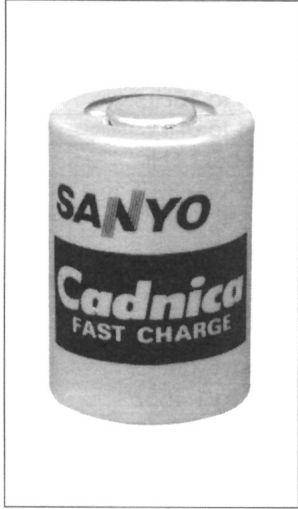


Nominal Capacity		1200mAh	
Nominal Voltage		1.2V	
Charging Current	Standard	125mA	
	Quick	375mA	
	Fast	1900mA	
Charging Time	Standard	14 to 16Hrs.	
	Quick	4 to 6Hrs.	
	Fast	about 1Hr.	
Ambient Temperature	Charge	Standard	0 to 45°C [32 to 113°F]
		Quick	10 to 45°C [50 to 113°F]
		Fast	5 to 40°C [41 to 104°F]
	Discharge		-20 to 60°C [-4 to 140°F]
	Storage		-30 to 50°C [-22 to 122°F]
Internal Impedance (Av.) (at 50% discharge)		5mOhms (at 1000Hz)	
Weight		43g/1.52oz	
Dimensions(D)x(H) (with tube)		23.0 <sup>0</sup> <sub>-1</sub> x 34 <sup>0</sup> <sub>-1</sub> mm 0.91 <sup>0</sup> <sub>-0.04</sub> x 1.34 <sup>0</sup> <sub>-0.04</sub> inch	

### Typical Characteristics


Charge Characteristics (5 cells pack)

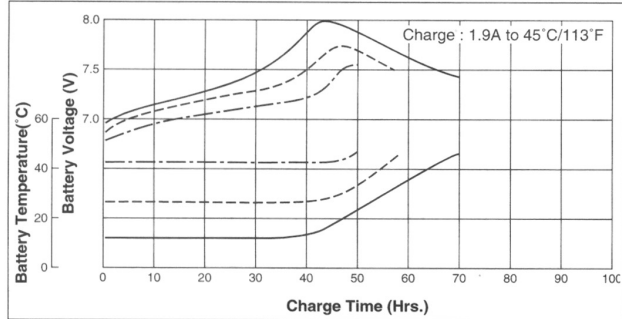


Discharge (at high rate)

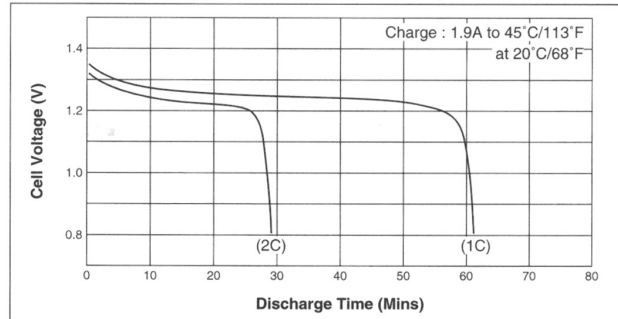


Cell Capacity (at various discharge rate)

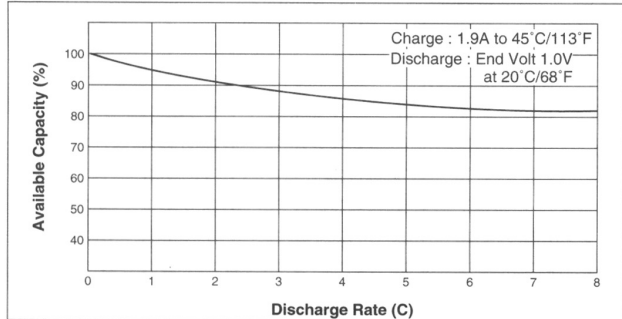

Discharge (at high rate)

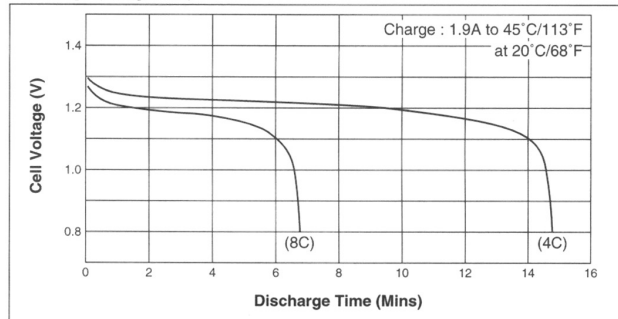

Discharge (at low rate)

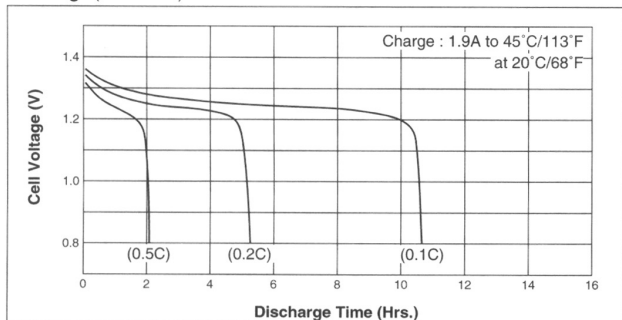

Temperature (Charge & Discharge)

